

## PRODUCT CONTENTS




### **DLC70 Series RF/Microwave Multilayer Chip Ceramic Capacitors** 01-07

#### Product Features

High Q, High RF Current/Voltage, High RF Power, Low ESR/ESL, Low Noise, Ultra-Stable Performance.

SIZE: 0402, 0603, 0505, 0805, 1111, 2225, 3838



### **DLC70 Series High RF Power Multilayer Chip Ceramic Capacitors** 08-12

#### Product Features

High Q, High RF Current/Voltage, High RF Power, Low ESR/ESL, Low Noise, Ultra-Stable Performance.

SIZE: 6040, 7575, 130130



### **Capacitor Assemblies Offering** 13-14

#### Product Features

High Q, High RF Current/Voltage, High RF Power, Low ESR/ESL, Low Noise, Ultra-Stable Performance, Custom-made.




### **DLC75 Series Ultra-Low ESR, RF/Microwave Ceramic Capacitors** 15-20

#### Product Features

Ultra-Low ESR, High Working Voltage, High RF Power, High Self-Resonance Frequency.

SIZE: 0201, 0402, 0603, 0805, 0708, 1111



### **Broadband Ceramic Capacitors** 21-22

#### Product Features

Small Size, Lower RF Impedance in Broadband, Low Insertion Losses, Low Reflection.

SIZE: 01005, 0201, 0402, 0805



### **General Purpose Non-Magnetic Multilayer Ceramic Capacitors** 23-29

#### Product Features

Non-Magnetic, Suitable for MRI and other equipment requiring non-magnetic.

SIZE: 0603, 0805, 1206, 1210




### **Non-Magnetic Chip Resistors** 30-34

#### Product Applications

MRI medical equipment, Measurement instrument, other non-magnetic applications.

SIZE: 0603, 0805, 1206



### **Single Layer Chip Ceramic Capacitor** 35-48

#### Product Applications

Suitable for RF/Microwave phased array radar T/R assembly, and filter, DC blocking and bypass at microwave frequencies.



## DLC70 Series RF/Microwave Multilayer Chip Ceramic Capacitors


### ◆ Product Features

High Q, High RF Current/Voltage, High RF Power, Low ESR/ESL, Low Noise, Ultra-Stable Performance.  
Lead capacitors' surface are coated with special coating, which can prevent arc and corona from occurring at high RF voltages.

### ◆ Product Applications

Typical Circuit Applications: High Frequency/Microwave/ RF Amplifiers, Low Noise Amplifiers, L/C Filters.  
Typical Applications Field: Mobile Base Stations, Repeaters, Wireless Broadcasting Equipments, Radio Stations, Radar, MRI Equipments, HSR Signal Transponders.

### ◆ Part Numbering

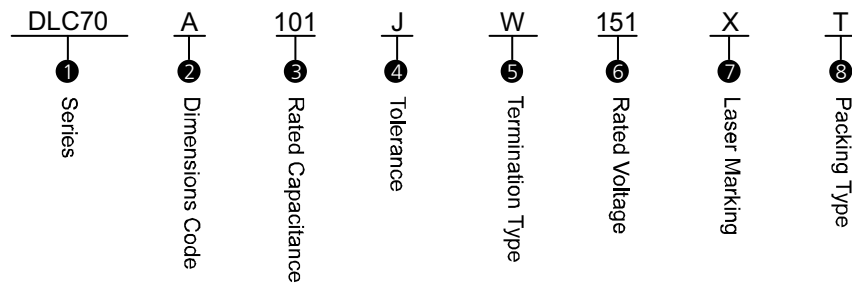

① **Series:** Dalicap 70 Series High Q High Power Capacitor, Temperature Coefficient: 0• 30ppm/C.

### ② Dimensions Code

unit:inch(millimeter)

	DLC70H	DLC70P	DLC70A	DLC70D
Length	.039 ± .004 (1.00 ± 0.10)	.063 ± .006 (1.60 ± 0.15)	.055(+.015--.010) (1.40+0.38--0.25)	.079 ± .008 (2.00 ± 0.20)
width	.020 ± .004(0.50 ± 0.10)	.031 ± .006(0.80 ± 0.15)	.055 ± .010(1.40 ± 0.25)	.049 ± .008(1.25 ± 0.20)
Thickness	.020 ± .004(0.50 ± 0.10)	.031 ± .006 (0.80 ± 0.15)	.057(1.45)max	.057(1.45)max
	DLC70B	DLC70C	DLC70E	
Length	.110(+.020--.010) (2.79+0.51--0.25)	.225(+.020--.010) (5.72+0.51--0.25)	.380(+.015--.010) (9.65+0.38--0.25)	
width	.110 ± .010(2.79 ± 0.25)	.250 ± .015(6.35 ± 0.38)	.380 ± .010(9.65 ± 0.25)	
Thickness	.100(2.54)max	.150(3.81)max	.170(4.32)max	

### ③ Rated Capacitance

Capacitance is less than 10pF; for example: 1R0=1.0pF, R denote decimal point.

Capacitance greater than 10pF; for example: 101=100pF, the third number is the power of 10.

### ④ Tolerance

Code	A	B	C	D	F	G	J
Tolerance	± 0.05pF	± 0.1pF	± 0.25pF	± 0.5pF	± 1%	± 2%	± 5%

### ⑤ Termination Type

Code	W	P	L
Type	100% Sn Solder over Nickel Plating	100% Sn Solder over Copper Plating (RoHS Compliant)	90% Sn 10% Pb Solder over Nickel Plating (Tin/Lead)

Code	MS	AR	RR	AW	RW
Type	Microstrip	Axial Ribbon	Radial Ribbon	Axial Wire	Radial Wire

Code	MN	AN	FN	BN	RN
Type	Non-mag Microstrip	Non-mag Axial Ribbon	Non-mag Radial Ribbon	Non-mag Axial Wire	Non-mag Radial Wire

### ⑥ Rated Voltage

Code	Rated Voltage(V)	Code	Rated Voltage(V)	Code	Rated Voltage(V)
500	50	301	300	252	2500
101	100	501	500	302	3000
151	150	601	600	362	3600
201	200	102	1000	722	7200
251	250	152	1500		

### ⑦ Laser Marking

X denotes Marking. Capacitance is less than 10pF; for example: the marking of 1.0pF is 1R0.

Capacitance greater than 10pF; for example: the marking of 100pF is 101.

### ⑧ Packaging Type

	70H	70P	70D	70A	70B	70C	70E
T: Horizontal Taping	✓	✓	✓	✓	✓	✓	✓
TV: Vertical Taping		✓	✓	✓	✓	✓	
B: Plastic Bag				✓	✓		
C: Waffle Box						✓	✓

### ◆ Performance Requirements

Capacitors are designed and manufactured to meet the requirements of MIL-PRF-55681 and MIL-PRF-123.


◆ Capacitance & Rated Voltage Table

Rated WVDC	Cap.pF	Size(inch)															
		DLC70H (0402)		DLC70P (0603)		DLC70A (0505)		DLC70D (0805)		DLC70R (0710)		DLC70B (1111)		DLC70C (2225)		DLC70E (3838)	
		Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC
	0.1	OR1															
	0.2	OR2															
	0.3	OR3															
	0.4	OR4															
	0.5	OR5															
	0.6	OR6															
	0.7	OR7															
	0.8	OR8															
	0.9	OR9															
	1.0	1R0															
	1.1	1R1															
	1.2	1R2															
	1.3	1R3															
	1.4	1R4															
	1.5	1R5	A, B, C, D.														
	1.6	1R6		A, B, C, D.													
	1.7	1R7															
	1.8	1R8															
	1.9	1R9															
	2.0	2R0															
	2.1	2R1															
	2.2	2R2															
	2.4	2R4															
	2.7	2R7															
	3.0	3R0															
	3.3	3R3															
	3.6	3R6															
	3.9	3R9															
	4.3	4R3															
	4.7	4R7															
	5.1	5R1															
	5.6	5R6															
	6.2	6R2															
	6.8	6R8															
	7.5	7R5															
	8.2	8R2															
	9.1	9R1															
	10	100															
	11	110															
	12	120															
	13	130															
	15	150															
	16	160															
	18	180	F, G, J.														
	20	200		F, G, J.													
	22	220															
	24	240															
	27	270															
	30	300															
	33	330															
	36	360															
	39	390															
	43	430															
	47	470															

◆ Capacitance & Rated Voltage Table

Rated WVDC	Cap.pF	Size(inch)															
		DLC70H (0402)		DLC70P (0603)		DLC70A (0505)		DLC70D (0805)		DLC70R (0710)		DLC70B (1111)		DLC70C (2225)		DLC70E (3838)	
		Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC
	51																
	56			F, G, J.	250V Code 251												
	62																
	68																
	75																
	82																
	91																
	100																
	110																
	120																
	130																
	150																
	160																
	180																
	200																
	220																
	240																
	270																
	300																
	330																
	360																
	390																
	430																
	470																
	510																
	560																
	620																
	680																
	750																
	820																
	910																
	1000																
	1100																
	1200																
	1500																
	1800																
	2200																
	2400																
	2700																
	3000																
	3300																
	3600																
	3900																
	4300																
	4700																
	5100																
	5600																
	10000																

### ◆ DLC70 Lead Type and Dimensions

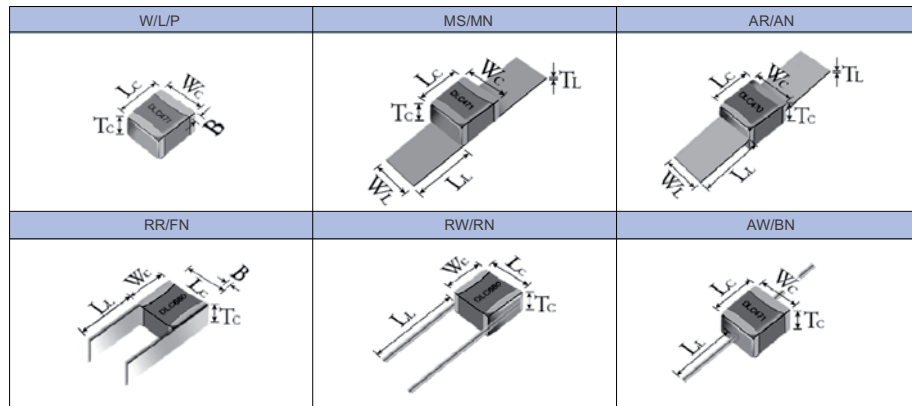

unit: inch(millimeter)

Series	Term. Code	Capacitor Dimensions				Lead Dimensions			Plated Material
		Length (Lc)	Width (Wc)	Thick. (Tc)	Overlap (B)	Length (Ll)	Width (Wl)	Thickness (Tl)	
DLC70B	MS/MN	.135 ± .015 (3.43 ± 0.38)	.110 ± .010 (2.79 ± 0.25)	.100 (2.54)max	.016 ~ .039 (0.40 ~ 1.00)	.250 (6.35)min	.093 ± .005 (2.36 ± 0.13)	.004 ± .001 (0.10 ± 0.025)	100% Ag
DLC70C	MS/MN AR/AN	.245 ± .025 (6.22 ± 0.64)	.250 ± .015 (6.35 ± 0.38)	.150 (4.19)max	.020 ~ .047 (0.50 ~ 1.20)	.500 (12.70) min	.118 ± .005 (3.00 ± 0.13)	.008 ± .001 (0.20 ± 0.025)	Silver-plated Copper
	RR/FN					.354 (9.00) min		Dia.=.031±.004 (0.80±0.10)	
	RW/RN					.709 (18.00) min			
	AW/BN					.906 (23.00) min			
DLC70E	MS/MN AR/AN	.380 +0.015 ~ -.010 (9.65 +0.38 ~ -0.25)	.380 ± .010 (9.65 ± 0.25)	.177 (4.50)max	.024 ~ .059 (0.60 ~ 1.50)	.750 (19.05) min	.118 ± .005 (3.00 ± 0.13)	.008 ± .001 (0.20 ± 0.025)	Silver-plated Copper
	RR/FN					.354 (9.00) min		Dia.=.031±.004 (0.80±0.10)	
	RW/RN					.709 (18.00) min			
	AW/BN					.906 (23.00) min			

### ◆ Performance

Item	Specifications
Quality Factor (Q)	Greater than 10,000 at 1 ± 0.1 MHz.
Insulation Resistance (IR)	Test Voltage: 500V 10 <sup>5</sup> Megohms min. @ +25°C at rated WVDC. 10 <sup>4</sup> Megohms min. @ +125°C at rated WVDC.
Rated Voltage	See Rated Voltage Table
Dielectric Withstanding Voltage (DWV)	250% of Rated Voltage for 5 seconds, Rated Voltage ≤ 500VDC 150% of Rated Voltage for 5 seconds, 500VDC < Rated Voltage ≤ 1250VDC 120% of Rated Voltage for 5 seconds, Rated Voltage > 1250VDC
Operating Temperature Range	-55°C ~ +125°C (70B 0.1pF ~ 1000pF can reach to -55°C ~ +175°C) Notes: For higher temperature, please contact with Dalicap.
Temperature Coefficient (TC)	0 ± 30 ppm/°C; (-55°C ~ +175°C, 0 ± 60 ppm/°C)
Capacitance Drift	± 0.2% or ± 0.05pF, whichever is greater.
Piezoelectric Effects	None
Termination Type	See Termination Type Table

Capacitors are designed and manufactured to meet the requirements of MIL-PRF-55681 and MIL-PRF-123.


### ◆ Environmental Tests

Item	Specifications	Method
Thermal Shock	DWV: the initial value IR: Shall not be less than 30% of the initial value Capacitance change: no more than 0.5% or 0.5pF, whichever is greater.	MIL-STD-202, Method 107, Condition A. At the maximum rated temperature stay 15 minutes. The time of removing shall not be more than 5 minutes. Perform the five cycles.
Moisture Resistance		MIL-STD-202, Method 106.
Humidity (steady state)	DWV: the initial value IR: the initial value Capacitance change: no more than 0.3% or 0.3pF, whichever is greater.	MIL-STD-202, Method 103, Condition A, with 1.5 Volts D.C. applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours minimum.
Life	IR: Shall not be less than 30% of the initial value Capacitance change: no more than 2.0% or 0.5pF, whichever is greater.	MIL-STD-202, Method 108, for 2000 hours, at 125°C. 200% of Rated Voltage for Capacitors, Rated Voltage ≤ 500VDC 120% of Rated Voltage for Capacitors, 500VDC < Rated Voltage ≤ 1250VDC 100% of Rated Voltage for Capacitors, Rated Voltage > 1250VDC


### ◆ Tape & Reel Specifications

	A0 (mm)	B0 (mm)	K0 (mm)	W (mm)	P0 (mm)	P1 (mm)	T (mm)	F (mm)	Qty/min	Qty/reel	Tape Material
0505-H	1.50	1.75	1.15	8.00	4.00	4.00	0.22	3.50	500	3000	Plastic
0505-H	1.40	1.80	0.95	8.00	4.00	4.00	0.25	3.50	500	3000	Plastic
0505-H	1.50	1.75	1.30	8.00	4.00	4.00	0.22	3.50	500	3000	Plastic
0505-V	1.10	1.60	1.40	8.00	4.00	4.00	0.30	3.50	500	1000	Plastic
1111-H	2.85	3.50	1.95	8.00	4.00	4.00	0.25	3.50	500	2000	Plastic
1111-H	2.85	3.60	2.40	8.00	4.00	4.00	0.25	3.50	500	2000	Plastic
1111-V	2.30	3.55	2.70	12.00	4.00	4.00	0.40	5.50	500	1500	Plastic
2225-H	6.70	6.20	3.40	16.00	4.00	12.00	0.30	7.50	100	500	Plastic
2225-V	4.10	6.15	6.55	16.00	4.00	8.00	0.40	7.50	100	300	Plastic
3838-H	10.10	10.10	3.30	16.00	4.00	16.00	0.30	7.50	50	300	Plastic
3838-H	10.10	10.10	4.30	16.00	4.00	16.00	0.40	7.50	50	200	Plastic

Horizontal Orientation



Vertical Orientation



### DLC70 Series High RF Power Multilayer Chip Ceramic Capacitors


#### ◆ Product Features

High Q, High RF Current/Voltage, High RF Power, Low ESR/ESL, Low Noise, Ultra-Stable Performance.

#### ◆ Product Applications

High RF Power Amplifiers, High Power Filter Networks, Wireless Demodulation.

#### ◆ Part Numbering

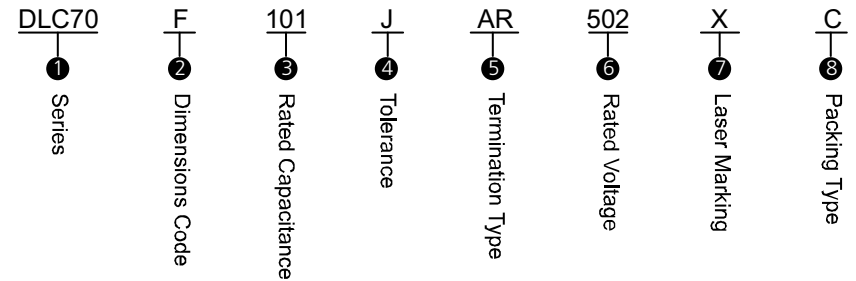

① **Series:** Dalicap 70 Series High RF Power Capacitor, Temperature Coefficient: 0• 30ppm/°C.

#### ② Dimensions Code

unit:inch(millimeter)

	DLC70F	DLC70G	DLC70L
Length	.614(+.015~-0.010) (15.60+0.38~-0.25)	.760(+.015~-0.010) (19.30+0.38~-0.25)	1.30(+.015~-0.010) (33.02+0.38~-0.25)
width	.433±.010(11.0±0.25)	.760±.010(19.30±0.25)	1.30±.010(33.02±0.25)
Thickness	.197(5.00)max	.197(5.00)max	.197(5.00)max

#### ③ Rated Capacitance

Capacitance is less than 10pF; for example: 1R0=1.0pF, R denotes decimal point.

Capacitance is not less than 10pF; for example: 101=100pF, the third number is the power of 10.

#### ④ Tolerance

Code	B	C	D	F	G	J
Tolerance	± 0.1pF	± 0.25pF	± 0.5pF	± 1%	± 2%	± 5%

#### ⑤ Termination Type

Code	W	P	L
Type	100% Sn Solder over Nickel Plating	100% Sn Solder over Copper Plating (RoHS Compliant)	90% Sn10%Pb Solder over Nickel Plating (Tin/Lead)



## DLC70 Series High RF Power Capacitors

### ⑤ Termination Type

Code	MS	AR	AW	RW
Type	Microstrip	Axial Ribbon	Axial Wire	Radial Wire

Code	MN	AN	BN	RN
Type	Non-mag Microstrip	Non-mag Axial Ribbon	Non-mag Axial Wire	Non-mag Radial Wire

### ⑥ Rated Voltage

Code	Rated Voltage(V)	Code	Rated Voltage(V)
301	300	302	3000
501	500	362	3600
102	1000	502	5000
152	1500	802	8000
202	2000	103	10000
252	2500		

### ⑦ Laser Marking

X denotes Marking. Capacitance is less than 10pF; for example: the marking of 1.0pF is 1R0.


Capacitance is not less than 10pF; for example: the marking of 100pF is 101.

### ⑧ Packaging Type

	70F	70G	70L
C: Waffle Tray packaging	✓	✓	✓
I: Special packaging		Consult with DALICAP	

### ◆ Performance Requirements

Capacitors are designed and manufactured to meet the requirements of MIL-PRF-55681 and MIL-PRF-123.

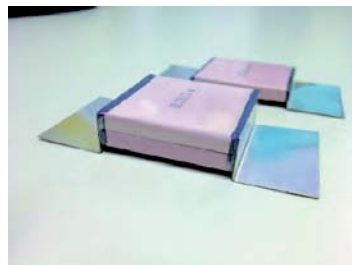


## DLC70 Series High RF Power Capacitors

### ◆ Capacitance & Rated Voltage Table

Rated WVDC		Size (inch)					
Cap. pF	Code	DLC70F (6040)		DLC70G (7575)		DLC70L (130130)	
		Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC
1.0	1R0						
1.2	1R2						
1.5	1R5						
1.6	1R6						
1.8	1R8						
2.2	2R2						
2.7	2R7						
3.3	3R3						
3.6	3R6						
3.9	3R9						
4.7	4R7						
5.6	5R6						
6.8	6R8						
8.2	8R2						
10	100						
12	120						
15	150						
18	180						
22	220						
27	270						
33	330						
39	390						
47	470						
56	560						
68	680						
82	820						
100	101						
120	121						
150	151						
180	181						
200	201						
220	221						
270	271						
300	301						
330	331						
390	391						
470	471						
560	561						
680	681						
820	821						
1000	102						
1200	122						
1500	152						
1800	182						
2200	222						

Rated WVDC		Size (inch)					
Cap. pF	Code	DLC70F (6040)		DLC70G (7575)		DLC70L (130130)	
		Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC
2700	272						
3300	332						
4700	472						
5100	512						
5600	562						
6800	682						
7500	752						
8200	822						
10000	103						
12000	123						
15000	153						
18000	183						
20000	203						
22000	223						
33000	333						
47000	473						
56000	563						
68000	683						
82000	823						
100000	104						
120000	124						

### ◆ DLC70 Lead Type and Dimensions

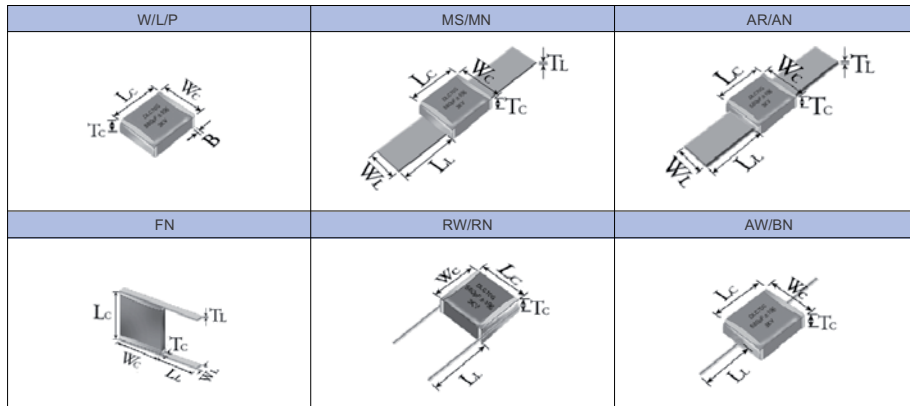

unit: inch(millimeter)

Series	Term. Code	Capacitor Dimensions				Lead Dimensions			Plated Material
		Length (Lc)	Width (Wc)	Thick. (Tc)	Overlap (B)	Length (Ll)	Width (Wl)	Thickness (Tl)	
DLC70F	MS/MN AR/AN	.614 +.015---.010 (15.60 +0.38--(-0.25))	.433 ± .010 (11.00 ± 0.25)	.197 (5.00) max	.024--.059 (0.60--1.50)	.748 (19.00) min	.350 ± .010 (8.89 ± 0.25)	.008 ± .001 (0.20 ± 0.025)	Silver-plated Copper
	RW/RN					.748 (19.00) min		Dia.=.030±.004 (0.76±0.10)	
	AW/BN					.906 (23.00) min			
DLC70G	MS/MN AR/AN	.760 +.015---.010 (19.30 +0.38--(-0.25))	.760 ± .010 (19.30 ± 0.25)	.197 (5.00) max	.024--.059 (0.60--1.50)	.748 (19.00) min	.591 ± .010 (15.00 ± 0.25)	.008 ± .001 (0.20 ± 0.025)	Silver-plated Copper
	RW/RN					.748 (19.00) min		Dia.=.030±.004 (0.76±0.10)	
	AW/BN					.906 (23.00) min			
DLC70L	MN/AN	1.300 +.015---.010 (33.02 +0.38--(-0.25))	1.300 ± .010 (33.02 ± 0.25)	.197 (5.00) max	.039--.071 (1.00--1.80)	.748 (19.00) min	1.299 ± .020 (33.00 ± 0.50)	.012 ± .001 (0.30 ± 0.025)	Silver-plated Copper
	FN					.669 (17.00) min		.157 ± .008 (4.00 ± 0.20)	

### ◆ Performance

Item	Specifications
Quality Factor (Q)	less than 1000pF, Q value more than 2000, Test frequency 1MHz; More than 1000pF, Q value more than 2000, Test frequency 1KHz;
Insulation Resistance (IR)	Test Voltage: 500V 10 <sup>5</sup> Megohms min. @ +25°C at rated WVDC. 10 <sup>4</sup> Megohms min. @ +125°C at rated WVDC.
Rated Voltage	See Rated Voltage Table
Dielectric Withstanding Voltage (DWV)	250% of Rated Voltage for 5 seconds, Rated Voltage ≤ 500VDC 150% of Rated Voltage for 5 seconds, 500VDC < Rated Voltage ≤ 1250VDC 120% of Rated Voltage for 5 seconds, Rated Voltage > 1250VDC
Operating Temperature Range	-55°C to +125°C Notes: For higher temperature, please contact with Dalicap.
Temperature Coefficient (TC)	0 ± 30 ppm/°C
Capacitance Drift	± 0.2% or ± 0.05pF, whichever is greater.
Piezoelectric Effects	None

Capacitors are designed and manufactured to meet the requirements of MIL-PRF-55681 and MIL-PRF-123.

### ◆ Environmental Tests

Item	Specifications	Method
Thermal Shock	DWV: the initial value IR: Shall not be less than 30% of the initial value Capacitance change: no more than 0.5% or 0.5pF, whichever is greater.	MIL-STD-202, Method 107, Condition A. At the maximum rated temperature stay 15 minutes. The time of removing shall not be more than 5 minutes. Perform the five cycles.
Moisture Resistance		MIL-STD-202, Method 106.
Humidity (steady state)	DWV: the initial value IR: the initial value Capacitance change: no more than 0.3% or 0.3pF, whichever is greater.	MIL-STD-202, Method 103, Condition A, with 1.5 Volts D.C. applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours minimum.
Life	IR: Shall not be less than 30% of the initial value Capacitance change: no more than 2.0% or 0.5pF, whichever is greater.	MIL-STD-202, Method 108, for 2000 hours, at 125°C. 200% of Rated Voltage for Capacitors, Rated Voltage ≤ 500VDC 120% of Rated Voltage for Capacitors, 500VDC < Rated Voltage ≤ 1250VDC 100% of Rated Voltage for Capacitors, Rated Voltage > 1250VDC

## Capacitor Assemblies Offering

### ◆ Product Features

High Operating Voltage, High Operating Current, Extended Capacitance, Tighter Tolerances, High Reliability, High Q, Ultra-low ESR, Non-Magnetic.

### ◆ Typical Applications Field

High Power RF, Medical Electronics, Broadcast, Semiconductor Manufacturing, High Magnetic Environments, Inductive Heating.

### ◆ Part Numbering

DLC	V	6	7	P	C	10	F	25	X	(G)
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪
DALICAP	V : Parallel Y : Series Z : Series/ Parallel	Number Capacitors	Termination Type 5 : Match 6 : Silver 7 : Copper 8 : silver plated copper strip	Cap. Type N:DLC70	Cap. Size B:1111 C:2225 E:3838 F:6040 G:7676 L:130130	Capacitance	Tolerance	Rated Voltage	Laser Marking	G: Molding: C: Coating: Null: No any coating

Capacitance: For capacitor values requiring 3 significant digits,

e.g. 1222.5pF =1222R5

e.g. DLCV66PC101F252X

Silver bracket assembly with six 2225C pieces in parallel, Capacitance is 100pF,

Capacitance tolerance is  $\pm 1\%$ , WVDC is 2500 V and Laser marking.

e.g. DLCY26PG1222R5G203X

Silver bracket assembly with two 2225C pieces in series, Capacitance is 1222.5pF,

Capacitance tolerance is  $\pm 2\%$ , WVDC is 20,000V and Laser marking.

### ◆ Capacitance and Voltage


By Buyer's requirements using existing drawings, mechanical sketches, or we can help with capable modeling of assemblies thermal rise predictions.

## ◆ Typical Assembly Configurations

### ① Parallel Assemblies

unit: inch(millimeter)

	70B	70C	70E	70F	70G
Lead Material	Silver-plated Copper or silver				
Lead Thickness	.004 or .010 (0.1 or 0.25)		.010 or .020 (0.25 or 0.51)		
Lead Length (max.)	.50 (12.7)	.75 (19.1)	2.0 (50.8)		
Capacitor Spacer (typ.)	.050 to .078 (1.3 to 2)		.06 to .10 (1.5 to 2.5)	.078 to .197 (2.0 to 5.0)	
Mtg Configuration	Horizontal/Vertical				

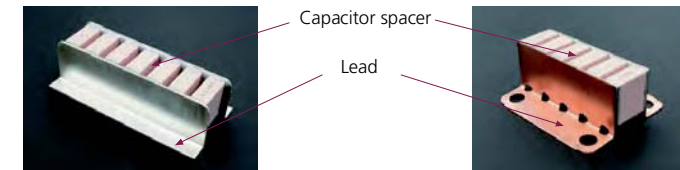

### ② Series Assemblies

unit: inch(millimeter)

	70C	70E	70F	70G
Lead Type	L-Bracket			
Lead Material	Silver-plated Copper or silver			
Lead Thickness	.010 (0.25)	.010 or .020 (0.25 or 0.51)		
Lead Length (max.)	.75 (19.1)	1.0 (25.4)		
Capacitor Spacer (typ.)	0 to .157 (0 to 4)			
Mtg Configuration	Horizontal			

### ③ Epoxy Molding



### ④ Other Assemblies By Buyer's requirement



### DLC75 Series Ultra-Low ESR, RF/Microwave Ceramic Capacitors

#### ◆ Product Features

Ultra-Low ESR, High Working Voltage, High RF Power,  
High Self-Resonance Frequency.




#### ◆ Product Applications

Typical Circuit Applications: High Power Filter Networks, Mixers, Couplers, Matching Networks, Output Coupling, Antenna Coupling, DC blocking, Bypass.

Typical Applications Field: VHA/UHF/Microwave Communication Systems, Mobile Base Stations, Repeaters, Wireless Broadcasting Equipments, Radio Stations, Radar, WiMAX, Satellite Communications.

#### ◆ Part Numbering

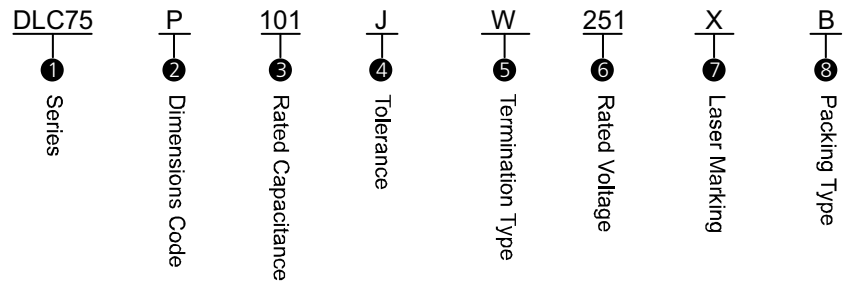

① **Series:** Dalicap 75 Series Low ESR Microwave Capacitor, Temperature Coefficient: 0± 30ppm/°C.

#### ② Dimensions Code

	DLC75N	DLC75H	DLC75P	DLC75D	DLC75B	DLC75R
Length	.024 ± .001 (0.60 ± 0.03)	.040 ± .004 (1.02 ± 0.10)	.063 ± .006 (1.60 ± 0.15)	.078 ± .010 (2.00 ± 0.25)	.110(+0.020-0.010) (2.79+0.51-0.25)	.070 ± .006 (1.78 ± 0.15)
width	.012 ± .001 (0.30 ± 0.03)	.020 ± .004 (0.51 ± 0.10)	.031 ± .006 (0.80 ± 0.15)	.049 ± .010 (1.20 ± 0.25)	.110 ± .010 (2.79 ± 0.25)	.080 ± .006 (2.03 ± 0.15)
Thickness	.012 ± .001 (0.30 ± 0.03)	.020 ± .004 (0.51 ± 0.10)	.031 ± .006 (0.80 ± 0.15)	.057(1.45)max	.102(2.60)max	.120(3.04)max

#### ③ Rated Capacitance

Capacitance is less than 10pF; for example: 1R0=1.0pF, R denote decimal point.

Capacitance greater than 10pF; for example: 101=100pF, the third number is the power of 10.

#### ④ Tolerance

Code	A	B	C	D	F	G	J
Tolerance	± 0.05pF	± 0.1pF	± 0.25pF	± 0.5pF	± 1%	± 2%	± 5%

#### ⑤ Termination Type

Code	W
Type	Nickel, Plated 100% Sn(RoHS)

#### ⑥ Rated Voltage

Code	Rated Voltage(V)
250	25
500	50
251	250
501	500

#### ⑦ Laser Marking

X denotes Marking. Capacitance is less than 10pF; for example: the marking of 1.0pF is 1R0.

Capacitance is not less than 10pF; for example: the marking of 100pF is 101.

#### ⑧ Packaging Type

	75N	75H	75P	75D	75B	75R
T: Horizontal Taping	✓	✓	✓	✓	✓	✓
B: Bulk packaging in a bag			✓	✓	✓	✓
TV: Vertical Taping			✓	✓	✓	

#### ◆ Performance Requirements

Capacitors are designed and manufactured to meet the requirements of MIL-PRF-55681 and MIL-PRF-123.

#### ◆ All products are in compliance with RoHS instruction.





◆ Capacitance & Rated Voltage Table

Rated WVDC Cap.pF		Size(inch)													
		DLC75N (0201)		DLC75H (0402)		DLC75P (0603)		DLC75A (0505)		DLC75D (0805)		DLC75R (0708)		DLC75B (1111)	
Cap.pF	Code	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC
0.1	0R1														
0.2	0R2														
0.3	0R3														
0.4	0R4														
0.5	0R5														
0.6	0R6														
0.7	0R7														
0.8	0R8														
0.9	0R9														
1.0	1R0				50V Code										
1.1	1R1				500										
1.2	1R2				200V or										
1.3	1R3				201										
1.4	1R4				250V Code										
1.5	1R5	A, B, C, D.		A, B, C, D.	251			A, B, C, D.							
1.6	1R6														
1.7	1R7														
1.8	1R8														B, C, D.
1.9	1R9														
2.0	2R0														
2.1	2R1														
2.2	2R2														
2.4	2R4														
2.7	2R7		25V Code												
3.0	3R0		or												
3.3	3R3		50V Code												
3.6	3R6		500												
3.9	3R9														
4.3	4R3														
4.7	4R7														
5.1	5R1														
5.6	5R6														
6.2	6R2														
6.8	6R8														
7.5	7R5														
8.2	8R2	B, C.		A, B, C.				B, C, J.							
9.1	9R1														
10	100														
11	110														
12	120														
13	130														
15	150														
16	160														
18	180														
20	200														
22	220														
24	240														
27	270														
30	300														
33	330				50V Code										
36	360				500										
39	390														
43	430														
47	470														

◆ Capacitance & Rated Voltage Table

Rated WVDC Cap.pF		Size(inch)													
		DLC75N (0201)		DLC75H (0402)		DLC75P (0603)		DLC75A (0505)		DLC75D (0805)		DLC75R (0708)		DLC75B (1111)	
Cap.pF	Code	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC	Tol.	Rated WVDC
51	510														
56	560														
62	620														
68	680														
75	750														
82	820														
91	910														
100	101														
110	111														
120	121														
130	131														
150	151														
160	161														
180	181														
200	201														
220	221														
240	241														
270	271														
300	301														
330	331														
360	361														
390	391														
430	431														
470	471														
510	511														
560	561														
620	621														
680	681														
750	751														
820	821														
910	911														
1000	102														

### ◆ Performance

Item	Specifications
Quality Factor (Q)	Greater than 2,000 at $1 \pm 0.1$ MHz
Insulation Resistance (IR)	$10^5$ Megohms min. @ $+25^\circ\text{C}$ at rated WVDC. $10^4$ Megohms min. @ $+125^\circ\text{C}$ at rated WVDC.
Rated Voltage	See Rated Voltage Table
Dielectric Withstanding Voltage (DWV)	250% of rated voltage for 5 seconds.
Operating Temperature Range	$-55^\circ\text{C}$ to $+150^\circ\text{C}$ Notes: For higher temperature, please contact with Dalicap.
Temperature Coefficient (TC)	$0 \pm 30$ ppm/ $^\circ\text{C}$
Capacitance Drift	$\pm 0.2\%$ or $\pm 0.05$ pF, whichever is greater.
Piezoelectric Effects	None


### ◆ Environmental Tests

Item	Specifications	Method
Thermal Shock	DWV: the initial value IR: Shall not be less than 30% of the initial value Capacitance change: no more than 0.5% or 0.5pF, whichever is greater.	MIL-STD-202, Method 107, Condition A. At the maximum rated temperature stay 15 minutes. The time of removing shall not be more than 5 minutes. Perform the five cycles.
Moisture Resistance	whichever is greater.	MIL-STD-202, Method 106.
Humidity (steady state)	DWV: the initial value IR: the initial value Capacitance change: no more than 0.3% or 0.3pF, whichever is greater.	MIL-STD-202, Method 103, Condition A, with 1.5 Volts D.C. applied while subjected to an environment of $85^\circ\text{C}$ with 85% relative humidity for 240 hours minimum.
Life	IR: Shall not be less than 30% of the initial value Capacitance change: no more than 2.0% or 0.5pF, whichever is greater.	MIL-STD-202, Method 108, for 2000 hours, at $125^\circ\text{C}$ . 200% of Rated Voltage for Capacitors, Rated Voltage $\leq 500$ VDC 120% of Rated Voltage for Capacitors, $500$ VDC < Rated Voltage $\leq 1250$ VDC 100% of Rated Voltage for Capacitors, Rated Voltage > 1250 VDC


### ◆ Tape & Reel Specifications

	A0 (mm)	B0 (mm)	K0 (mm)	W (mm)	P0 (mm)	P1 (mm)	T (mm)	F (mm)	Qty/min	Qty/reel	Tape Material
0201-H	0.40	0.70	-	8.00	4.00	2.00	0.42	3.50	1000	15000	Paper
0402-H	0.70	1.20	-	8.00	4.00	2.00	0.65	3.50	1000	10000	Paper
0603-H	1.05	1.80	-	8.00	4.00	4.00	0.95	3.50	500	4000	Paper
0708-H	1.90	2.65	2.20	8.00	4.00	4.00	0.25	3.50	500	1000	Plastic
0805-H	1.45	2.30	0.95	8.00	4.00	4.00	0.22	3.50	500	3000	Plastic
0805-H	1.37	2.20	1.20	8.00	4.00	4.00	0.22	3.50	500	3000	Plastic
0805-V	1.35	2.25	1.35	8.00	4.00	4.00	0.22	3.50	500	1000	Plastic
1111-H	2.85	3.50	1.95	8.00	4.00	4.00	0.25	3.50	500	2000	Plastic
1111-H	2.85	3.60	2.40	8.00	4.00	4.00	0.25	3.50	500	2000	Plastic
1111-V	2.30	3.55	2.70	12.00	4.00	4.00	0.40	5.50	500	1500	Plastic

Horizontal Orientation



Vertical Orientation



**Broadband Capacitors**

**Product Features**

Series	Typical operating frequency range	Insertion Loss	Plated Material	Packaging Type
(.010" × .005")01005BB104MW4R0	16KHz(-3dB) to >67GHz	<1dB, typical		40K pcs/reel, lower quantities in cut tape
(.020" × .010")0201BB104KW160	16KHz(-3dB) to >40GHz	<1dB, typical	Au/Sn (RoHS)	15K pcs/reel, lower quantities in cut tape
(.020" × .010")0201BB103KW250	16KHz(-3dB) to >32GHz	<1dB, typical		
(.040" × .020")0402BB103KW500	16KHz(-3dB) to 40GHz	<1dB, typical	Au/Sn (RoHS)	10K pcs/reel, lower quantities in cut tape
(.040" × .020")0402BB104KW500	16KHz(-3dB) to 50GHz	<1.2dB, typical		
(.080" × .050")0805BB103KW101	16KHz(-3dB) to 3GHz	<0.25dB, typical	Ni/Sn(RoHS)	

**Mechanical Dimensions**


unit:inch(millimeter)

Outlines	Code	Capacitor Dimensions			
		Length (L)	Width (W)	Thick. (T)	(S)
	01005	.016 ± .001 (0.40 ± 0.03)	.008 ± .001 (0.20 ± 0.03)	.008 ± .001 (0.20 ± 0.03)	.005(0.13)min
	0201	.023 ± .001 (0.58 ± 0.03)	.012 ± .001 (0.30 ± 0.03)	.0118(0.30)max	.0078(0.20)min
	0402	.040 ± .004 (1.016 ± 0.102)	.020 ± .004 (0.508 ± 0.102)	.024(0.61)max	.016(0.406)min
	0805	.080 ± .006 (2.03 ± 0.15)	.050 ± .006 (1.27 ± 0.15)	.040(1.02)max	.044(1.12)min

**Electrical Specifications**

Item	Series					
Rated Voltage	01005BB104 MW4R0	0201BB104 KW160	0201BB103 KW250	0402BB103 KW500	0402BB104 KW500	0805BB103 KW101
	4WVDC	16WVDC	25WVDC	50WVDC	50WVDC	100WVDC
Capacitance	100nF	100nF	10nF	10nF	100nF	10nF
Operating Temperature Range.	-55°C to +85°C		-55°C to +125°C			
Insulation Resistance (IR)	10 <sup>11</sup> Ω min. @ +25°C @ rated WVDC					
Dielectric Withstanding Voltage (DWW)	250% of rated voltage for 5 seconds.					
Temperature Coefficient (TC)	± 15%					

**Part Numbering**

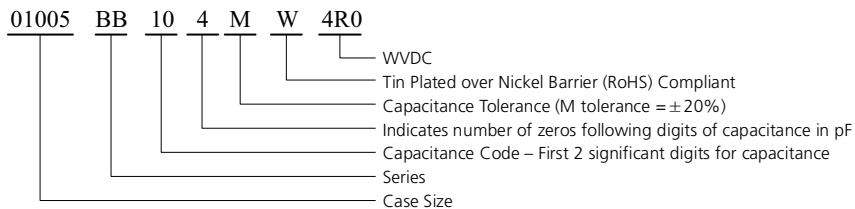

**Introduction**

There are a number of circuits that require coupling RF signals or bypassing them to ground while blocking DC over extraordinarily large RF bandwidths. The applications for which they are intended typically require small, surface-mountable (SMT) units with low insertion losses, reflections, and impedances across RF frequencies extending from the tens of KHz to the tens of GHz. and temperatures typically ranging from -55 to +85°C. This note focuses on a particular implementation of these devices -- multilayer ceramic capacitors (MLCCs)- and how to obtain the best performance when they're used on various substrates.

Broadband capacitors are used in the "signal integrity" market -- optoelectronics/high-speed data; ROSA/TOSA (Transmit/Receive optical subassemblies); SONET (Synchronous Optical Networks); broadband test equipment - as well as in broadband microwave and millimeter wave amplifiers (MMICs, GaN transistors) and oscillators. The basic requirement in the former is to produce an output waveform that closely replicates an input waveform, typically a train of digital pulses, as shown in Fig.1.

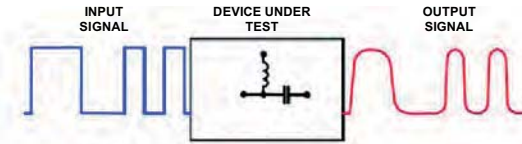


Fig.1 "Signal Integrity"- output replication of input

While RF and microwave devices are typically measured in the frequency domain, digital systems are usually characterized in the time domain, and so it is necessary to make a connection between the two (Fig.2).

**FREQUENCY DOMAIN**

- Insertion loss
- Reflection

**TIME DOMAIN**

- Rise and fall times
- Eye opening
- Jitter

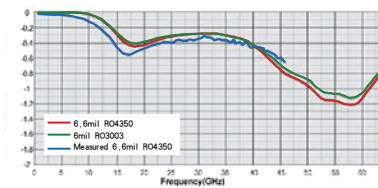


Fig.2 Frequency domain and time domain parameters




## General Purpose Non-Magnetic Multilayer Ceramic Capacitors

### ◆ Product Features

Non-Magnetic, Suitable for MRI and other equipment requiring non-magnetic.

### ◆ Part Numbering

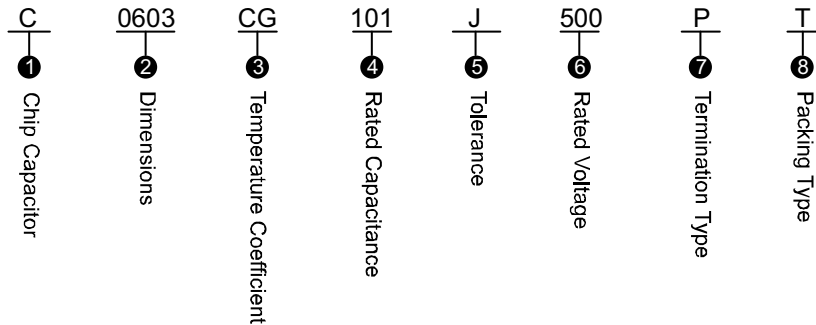

① C: General Purpose Non-Magnetic Multilayer Ceramic Capacitors

### ② Dimensions

unit: millimeter

Series	L	W	T	B(Min)	B(Max)
0603	1.60 ± 0.10	0.80 ± 0.10	0.80 ± 0.10	0.20	0.50
0805	2.00 ± .020	1.20 ± .020	1.40	0.25	0.60
1206	3.20 ± .020	1.60 ± .020	1.40	0.25	0.60
1210	3.20 ± .020	2.50 ± .020	2.00	0.25	0.70

### ③ Temperature Coefficient

CG: 0 • 30ppm/°C

X: • 15%

### ④ Rated Capacitance

Capacitance is less than 10pF; for example: 1R0=1.0pF, R denote decimal point.

Capacitance greater than 10pF; for example: 101=100pF, the third number is the power of 10.

### ⑤ Tolerance

Code	B	C	D	G	J	K
Tolerance	± 0.1pF	± 0.25pF	± 0.5pF	± 2%	± 5%	± 10%

### ⑥ Rated Voltage

Code	Rated Voltage(V)	Code	Rated Voltage(V)
250	25	251	250
500	50	501	500
101	100	102	1000
201	200	202	2000

### ⑦ Laser Marking

P: 100% Sn Solder over Copper Plating (RoHS Compliant)

### ⑧ Packaging Type

T: Tape carrier packing

	A0 (mm)	B0 (mm)	K0 (mm)	W (mm)	P0 (mm)	P1 (mm)	T (mm)	F (mm)	Qty/min	Qty/reel	Tape Material
0603	1.05	1.80	0.90	8.00	4.00	4.00	0.90	3.50	1000	4000	Paper
0805	1.40	2.20	1.20	8.00	4.00	4.00	0.22	3.50	1000	3000	Plastic
1206	1.91	3.51	1.30	8.00	4.00	4.00	0.25	3.50	1000	3000	Plastic
1210	2.85	3.50	1.95	8.00	4.00	4.00	0.25	3.50	1000	3000	Plastic



◆ Capacitance & Rated Voltage Table

unit: V

CG Code.	0603					0805				1206					1210					
	25	50	100	200	250	50	100	200	250	50	100	200	250	500	50	100	200	250	500	1000
1R0																				
1R2																				
1R5																				
1R8																				
2R2																				
2R7																				
3R3																				
3R9																				
4R7																				
5R6																				
6R8																				
8R2																				
100																				
120																				
150																				
180																				
220																				
270																				
330																				
390																				
470																				
560																				
680																				
820																				
101																				
121																				
151																				
181																				
221																				
271																				
331																				
391																				
471																				
561																				
681																				
821																				
102																				



◆ Capacitance & Rated Voltage Table

unit: V

X7R Code.	0603					0805				1206					1210					
	25	50	100	200	250	50	100	200	250	50	100	200	250	500	50	100	200	250	500	1000
331																				
471																				
681																				
821																				
102																				
152																				
222																				
332																				
472																				
682																				
103																				
153																				
223																				
333																				
473																				
683																				
104																				
154																				
224																				
334																				
474																				
684																				
105																				

◆ Specifications and Test Methods

No.	Item	Specification	Test Method																																															
1	Operating Temperature	C0G: -55°C ~ +125°C X7R: -55°C ~ +125°C																																																
2	Appearance	No defects or abnormality	Visual inspection: X 10 microscope.																																															
3	Dimensions	See the previous pages	Callipers inspection																																															
4	Capacitance	Shall be Within the applicable tolerance specified.																																																
5	D.F.	<p>C0G: Cap ≥ 30pF, Q ≥ 1000; Cap &lt; 30pF, Q ≥ 400+20C</p> <p>X7R:</p> <table border="1"> <thead> <tr> <th>Voltage</th> <th>D.F.</th> <th>Exception of D.F.</th> </tr> </thead> <tbody> <tr> <td rowspan="3">≥ 50V</td> <td rowspan="3">≤ 2.5%</td> <td>0201 (50V), 0603 ≥ 0.047 μF</td> </tr> <tr> <td>0805 ≥ 0.18 μF; 1206 ≥ 0.47 μF</td> </tr> <tr> <td>1210 ≥ 0.47 μF; 1812 ≥ 0.47 μF</td> </tr> <tr> <td rowspan="3">25V</td> <td rowspan="3">≤ 3.5%</td> <td>≤ 5%</td> </tr> <tr> <td>0805 ≥ 1 μF; 1210 ≥ 10 μF</td> </tr> <tr> <td>≤ 7%</td> </tr> <tr> <td rowspan="3">16V</td> <td rowspan="3">≤ 3.5%</td> <td>0402 ≥ 0.1 μF; 0603 ≥ 0.33 μF</td> </tr> <tr> <td>0805 ≥ 2.2 μF; 1206 ≥ 4.7 μF</td> </tr> <tr> <td>0603 ≥ 0.68 μF; 0805 ≥ 4.7 μF</td> </tr> <tr> <td rowspan="3"></td> <td rowspan="3">≤ 10%</td> <td>0201 ≥ 4.7 μF; 0402 ≥ 0.033 μF</td> </tr> <tr> <td>0603 ≥ 0.15 μF; 0805 ≥ 0.68 μF</td> </tr> <tr> <td>1206 ≥ 2.2 μF; 1210 ≥ 4.7 μF</td> </tr> <tr> <td rowspan="3"></td> <td rowspan="3">≤ 10%</td> <td>0603 ≥ 0.68 μF; 0805 ≥ 2.2 μF</td> </tr> <tr> <td>1206 ≥ 6.8 μF; 1210 ≥ 22 μF</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Type</th> <th>Capacitance</th> <th>Test Voltage</th> <th>Test Frequency</th> </tr> </thead> <tbody> <tr> <td>Class 1 (C0G)</td> <td>≤ 1000pF</td> <td>1.0 ± 0.2Vrms</td> <td>1MHz ± 10%</td> </tr> <tr> <td></td> <td>&gt; 1000pF</td> <td>1.0 ± 0.2Vrms</td> <td>1KHz ± 10%</td> </tr> <tr> <td>Class 2 (X7R)</td> <td>≤ 10 μF</td> <td>1.0 ± 0.2Vrms</td> <td>1KHz ± 10%</td> </tr> <tr> <td></td> <td>&gt; 10 μF</td> <td>0.5 ± 0.2Vrms</td> <td>120Hz ± 20%</td> </tr> </tbody> </table> <p>Before initial measurement (X7R only) to apply de-gaging at 150°C for 1hr then set for 24±2hrs at room temp.</p>	Voltage	D.F.	Exception of D.F.	≥ 50V	≤ 2.5%	0201 (50V), 0603 ≥ 0.047 μF	0805 ≥ 0.18 μF; 1206 ≥ 0.47 μF	1210 ≥ 0.47 μF; 1812 ≥ 0.47 μF	25V	≤ 3.5%	≤ 5%	0805 ≥ 1 μF; 1210 ≥ 10 μF	≤ 7%	16V	≤ 3.5%	0402 ≥ 0.1 μF; 0603 ≥ 0.33 μF	0805 ≥ 2.2 μF; 1206 ≥ 4.7 μF	0603 ≥ 0.68 μF; 0805 ≥ 4.7 μF		≤ 10%	0201 ≥ 4.7 μF; 0402 ≥ 0.033 μF	0603 ≥ 0.15 μF; 0805 ≥ 0.68 μF	1206 ≥ 2.2 μF; 1210 ≥ 4.7 μF		≤ 10%	0603 ≥ 0.68 μF; 0805 ≥ 2.2 μF	1206 ≥ 6.8 μF; 1210 ≥ 22 μF	Type	Capacitance	Test Voltage	Test Frequency	Class 1 (C0G)	≤ 1000pF	1.0 ± 0.2Vrms	1MHz ± 10%		> 1000pF	1.0 ± 0.2Vrms	1KHz ± 10%	Class 2 (X7R)	≤ 10 μF	1.0 ± 0.2Vrms	1KHz ± 10%		> 10 μF	0.5 ± 0.2Vrms	120Hz ± 20%	
Voltage	D.F.	Exception of D.F.																																																
≥ 50V	≤ 2.5%	0201 (50V), 0603 ≥ 0.047 μF																																																
		0805 ≥ 0.18 μF; 1206 ≥ 0.47 μF																																																
		1210 ≥ 0.47 μF; 1812 ≥ 0.47 μF																																																
25V	≤ 3.5%	≤ 5%																																																
		0805 ≥ 1 μF; 1210 ≥ 10 μF																																																
		≤ 7%																																																
16V	≤ 3.5%	0402 ≥ 0.1 μF; 0603 ≥ 0.33 μF																																																
		0805 ≥ 2.2 μF; 1206 ≥ 4.7 μF																																																
		0603 ≥ 0.68 μF; 0805 ≥ 4.7 μF																																																
	≤ 10%	0201 ≥ 4.7 μF; 0402 ≥ 0.033 μF																																																
		0603 ≥ 0.15 μF; 0805 ≥ 0.68 μF																																																
		1206 ≥ 2.2 μF; 1210 ≥ 4.7 μF																																																
	≤ 10%	0603 ≥ 0.68 μF; 0805 ≥ 2.2 μF																																																
		1206 ≥ 6.8 μF; 1210 ≥ 22 μF																																																
		Type	Capacitance	Test Voltage	Test Frequency																																													
Class 1 (C0G)	≤ 1000pF	1.0 ± 0.2Vrms	1MHz ± 10%																																															
	> 1000pF	1.0 ± 0.2Vrms	1KHz ± 10%																																															
Class 2 (X7R)	≤ 10 μF	1.0 ± 0.2Vrms	1KHz ± 10%																																															
	> 10 μF	0.5 ± 0.2Vrms	120Hz ± 20%																																															
6	Insulation Resistance (IR)	No less than 10G Ω or 500M Ω μF, whichever is smaller.	<p>Voltage: DC Rated Voltage</p> <p>Charging Time: 1~2 min</p> <p>Charge/discharge current: 50mA max.</p> <p>Measurement Temperature: 25°C</p> <p>Measurement Humidity: 75%</p>																																															
7	Dielectric withstanding voltage (DWV)	Shall be no evidence of breakdown or visible evidence of arcing or damage.	<p>1. Test Voltage: 250% of Rated Voltage, Rated Voltage ≤ 500VDC 150% of Rated Voltage, 500VDC &lt; Rated Voltage ≤ 1250VDC 120% of Rated Voltage, Rated Voltage &gt; 1250VDC</p> <p>2. Applied Time: 1s to 5 s</p> <p>3. Charge/discharge current: 50mA max.</p>																																															

◆ Specifications and Test Methods

No.	Item	Specification	Test Method																				
8	Temperature Coefficient	<table border="1"> <thead> <tr> <th>Type</th> <th>Temperature coefficient ppm/°C</th> </tr> </thead> <tbody> <tr> <td>C0G</td> <td>0 ± 30</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Type</th> <th>Temperature Characteristics</th> </tr> </thead> <tbody> <tr> <td>X7R</td> <td>± 15%</td> </tr> </tbody> </table>	Type	Temperature coefficient ppm/°C	C0G	0 ± 30	Type	Temperature Characteristics	X7R	± 15%	<p>Conduct the five cycles according to the temperatures as below.</p> <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>25 ± 2°C</td> </tr> <tr> <td>2</td> <td>-55 ± 3°C</td> </tr> <tr> <td>3</td> <td>25 ± 2°C</td> </tr> <tr> <td>4</td> <td>125 ± 3°C</td> </tr> <tr> <td>5</td> <td>25 ± 2°C</td> </tr> </tbody> </table> <p>C0G:  <math>TC = \frac{C_x - C_1}{C_1 \times \Delta T} \times 10^6</math> (ppm/°C)</p> <p>X7R:  <math>TC = \frac{C_x - C_1}{C_1} \times 100</math> (%)</p>	Step	Temperature (°C)	1	25 ± 2°C	2	-55 ± 3°C	3	25 ± 2°C	4	125 ± 3°C	5	25 ± 2°C
Type	Temperature coefficient ppm/°C																						
C0G	0 ± 30																						
Type	Temperature Characteristics																						
X7R	± 15%																						
Step	Temperature (°C)																						
1	25 ± 2°C																						
2	-55 ± 3°C																						
3	25 ± 2°C																						
4	125 ± 3°C																						
5	25 ± 2°C																						
9	Adhesive strength of termination	No removal of the terminations or other defect should occur.	<p>Pressurizing force: 01R5/0201: 2N; 0402/0603: 5N; 0805/1206/1210/1812: 10N</p> <p>Test time: 10±1 sec.</p>																				
10	Bending strength	<p>No cracking shall occur.</p> <p>Cap change: C0G: within ±5% or 0.5pF whichever is larger X7R: within ±12.5%</p>	<p>Solder the capacitor on test jig (glass epoxy board). Then apply a force in the direction shown in below fig. Flexure: 1mm; Holding time: 5±1s</p> <p>Fig.2 (in mm)</p>																				
11	Solderability of Termination	Shall be at least 85 percent covered with a smooth solder coating.	<p>Immerse the capacitor in a eutectic solution requirement temperature (230±5°C) for 2±0.5 seconds. Capacitor shall be immersed to a depth of 10mm.</p>																				

### ◆ Specifications and Test Methods

No.	Item	Specification	Test Method
12	Resistance to Soldering Heat	Appearance	No evidence of mechanical damage or delamination or exposed.
		Capacitance Change $\Delta C$	C0G: Within $\pm 2.5\%$ or $0.25\text{pF}$ (Whichever is larger) X7R: Within $\pm 12.5\%$ .
		D.F.	To meet initial requirement.
		Insulation Resistance	No less than $10\text{G}\Omega$ or $500\text{M}\Omega\mu\text{F}$ , Whichever is smaller.
13	Temperature Cycle	Appearance	No evidence of mechanical damage
		Capacitance Change $\Delta C$	C0G: Within $\pm 2.5\%$ or $0.25\text{pF}$ (Whichever is larger) X7R: Within $\pm 7.5\%$ .
		D.F.	To meet initial requirement.
		Insulation Resistance	No less than $10\text{G}\Omega$ or $500\text{M}\Omega\mu\text{F}$ , Whichever is smaller.

Step	Temperature(°C)	Time(minutes)
1	-55°C (0--3°C)	30±3
2	25°C	2~3
3	125°C (0--3)	30±3
4	25°C	2~3

### ◆ Non-Magnetic Chip Resistors


#### ◆ Product Features

1. Non-Magnetic chip resistors by copper plating on middle termination.
2. Suited for reflow and flow solder.
3. Suitable for no lead soldering.
4. Lead free, Meet RoHS compliant.


#### ◆ Product Applications

MRI medical equipment, Measurement instrument, other non-magnetic applications.


#### ◆ Part Number

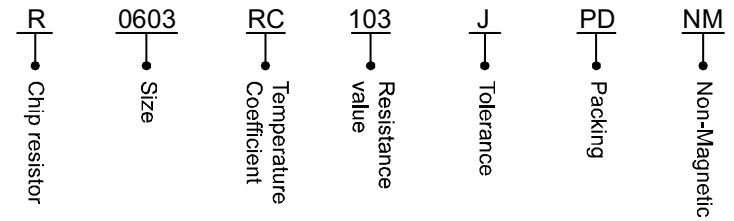


#### ◆ Configuration

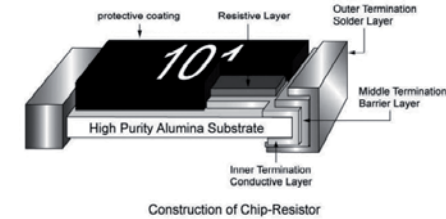

#### ◆ Dimensions

	Size	L	W	C	D	T
	0603	1.60±0.10	0.80±0.10	0.30±0.20	0.30±0.20	0.45±0.10
	0805	2.00±0.10	1.25±0.10	0.40±0.20	0.40±0.20	0.50±0.10
	1206	3.10±0.10	1.60±0.10	0.50±0.20	0.50±0.25	0.55±0.10

#### ◆ Power Derating Curve

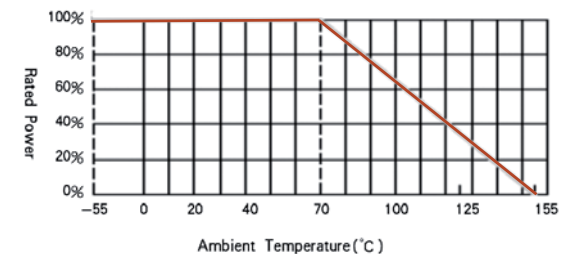





◆ Rated Value

Size	Rated Power At 70°C	RCWV Max.	Overload Voltage Max.	Tolerance	Temperature Coefficient ppm/°C	Resistance Range		Standard Resistance Value
						Min.	Max.	
0603	1/10W	50V	100V	± 1%(F)	± 100	1Ω	10MΩ	E-96
				± 5%(J)	± 200	0Ω & 1Ω	10MΩ	E-24
0805	1/8W	150V	300V	± 1%(F)	± 100	1Ω	10MΩ	E-96
				± 5%(J)	± 200	0Ω & 1Ω	10MΩ	E-24
1206	1/4W	200V	400V	± 1%(F)	± 100	1Ω	10MΩ	E-96
				± 5%(J)	± 200	0Ω & 1Ω	10MΩ	E-24

Jumper: 0603 size maximum resistance ≤ 50mΩ and rated current ≤ 1A.  
 0805, 1206 size maximum resistance ≤ 50mΩ and rated current ≤ 2A.  
 1Ω ~ 10Ω: Temperature Coefficient of Resistance for 0603, 0805, 1206 = -300~+500ppm/°C.

◆ Soldering Temperature Curve

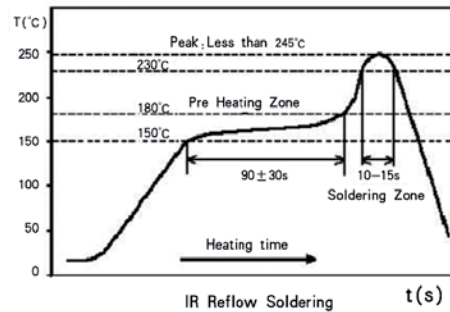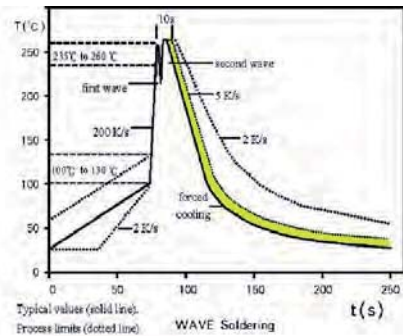

◆ Resistance Marking

**R100** 4 digit marking for ± 1%.  
 For example: 1R00 = 1Ω; R100 = 100mΩ; R047 = 47mΩ;

**R10** 3 digit marking for 0603 ± 1%.  
 For example: 1R0 = 1Ω; R10 = 100mΩ; R50 = 500mΩ;

E-24 Series

**473** 3 digit marking for ± 5% E24.  
 For example: 473 = 47kΩ; 1R5 = 1.5Ω; 0 = 0Ω;

E-96 Series

**1542** 4 digit marking for E96.  
 For example: 1542 = 15k4Ω; 22R1 = 22.1Ω;

**02C** 3 digit marking for E96-0603.  
 For example: 02C = 102 × 100 = 10.2kΩ;

◆ 0603 1% Marking Table


Code	E48	E96	Code	E48	E96	Code	E48	E96	Code	E48	E96
01	100	100	25	178	178	49	316	316	73	562	562
02			26		182	50		324	74		576
03	105	105	27	187	187	51	332	332	75	590	590
04			28		191	52		340	76		604
05	110	110	29	196	196	53	348	348	77	619	619
06		113	30		200	54		357	78		634
07	115	115	31	205	205	55	365	365	79	649	649
08		118	32		210	56		374	80		665
09	121	121	33	215	215	57	383	383	81	681	681
10		124	34		221	58		392	82		698
11	127	127	35	226	226	59	402	402	83	715	715
12		130	36		232	60		412	84		732
13	133	133	37	237	237	61	422	422	85	750	750
14		137	38		243	62		432	86		768
15	140	140	39	249	249	63	442	442	87	787	787
16		143	40		255	64		453	88		806
17	147	147	41	261	261	65	464	464	89	825	825
18		150	42		267	66		475	90		845
19	154	154	43	274	274	67	487	487	91	866	866
20		158	44		280	68		499	92		887
21	162	162	45	287	287	69	511	511	93	909	909
22		165	46		294	70		523	94		931
23	169	169	47	301	301	71	536	536	95	953	953
24		174	48		309	72		549	96		976

Code	A	B	C	D	E	F	G	H	X	Y	Z
Multiplier	10 <sup>0</sup>	10 <sup>1</sup>	10 <sup>2</sup>	10 <sup>3</sup>	10 <sup>4</sup>	10 <sup>5</sup>	10 <sup>6</sup>	10 <sup>7</sup>	10 <sup>-1</sup>	10 <sup>-2</sup>	10 <sup>-3</sup>

◆ Standard Resistance Value


	10				22				47				68			
E3																
E6	10	15	22	33	47	68	100	150	220	330	470	680	1000	1500	2200	3300
E12	10	12	15	18	22	27	33	39	47	56	68	82	100	120	150	180
E24	10	11	12	13	15	16	18	20	22	24	27	30	33	36	39	43
	51	56	62	68	75	82	91									
	100	102	105	107	110	113	115	118	121	124	127	130	133	137	140	143
	150	154	158	162	165	169	174	178	182	187	191	196	200	205	210	215
	226	232	237	243	249	255	261	267	274	280	287	294	301	309	316	324
	340	348	357	365	374	383	392	402	412	422	432	442	453	464	475	487
	511	523	536	549	562	576	590	604	619	634	649	665	681	698	715	732
	768	787	806	825	845	866	887	909	931	953	975					

◆ Tape and Reel Package

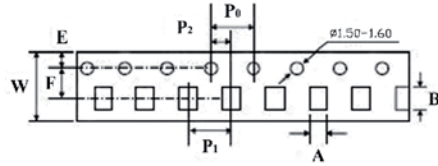

unit:millimeter

	A (mm)	B (mm)	W (mm)	F (mm)	E (mm)	P0 (mm)	P1 (mm)	P2 (mm)
0603	1.10 ± 0.20	1.90 ± 0.20	8.00 ± 0.30	3.50 ± 0.05	1.75 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05
0805	1.65 ± 0.20	2.40 ± 0.20	8.00 ± 0.30	3.50 ± 0.05	1.75 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05
1206	2.00 ± 0.20	3.60 ± 0.20	8.00 ± 0.30	3.50 ± 0.05	1.75 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05

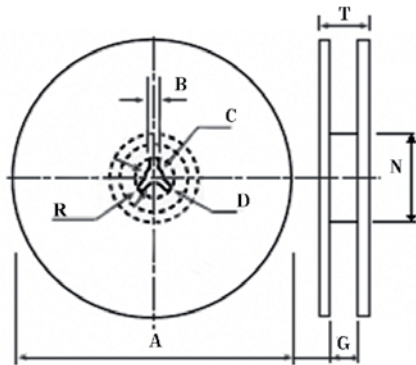






unit:millimeter

	A (mm)	N (mm)	C (mm)	D (mm)	B (mm)	G (mm)	T (mm)	Qty/reel
0603	178.0 ± 2.0	60.0 ± 0.5	13.0 ± 0.5	20min	2.0 ± 0.5	10.0 ± 1.5	14.9max	5000
0805	254.0 ± 2.0	100.0 ± 1.0	13.5 ± 0.5	20min	2.0 ± 0.5	10.0 ± 1.5	14.9max	10000
1206	330.0 ± 2.0	100.0 ± 1.0	13.5 ± 0.5	20min	2.0 ± 0.5	10.0 ± 1.5	14.9max	20000

◆ Specification and Test Methods

Item	Specifications	Test Methods
DC Resistance	F: ± 1%; J: ± 5%;	IEC 60115-1/JIS C 5201-1, Clause 4.5. Measure the resistance value.
Short time Overload	J: $\Delta R \leq \pm (2\% + 0.1 \Omega)$ F: $\Delta R \leq \pm (1\% + 0.05 \Omega)$	IEC 60115-1/JIS C 5201-1, Clause 4.13. 2.5 x Rated voltage or Max. Overload Voltage for 5 second. Measure resistance after 30 minutes.
Solderability	Over 95% of termination must be covered with (Sn+Ag+Cu)	IEC 60115-1/JIS C 5201-1, Clause 4.17. After immersing flux, dip in the 245 ± 2 °C molten solder bath for 3 ± 0.5sec.
Resistance to Solder Heat	J: $\Delta R \leq \pm (1\% + 0.1 \Omega)$ F: $\Delta R \leq \pm (0.5\% + 0.05 \Omega)$ No mechanical damage.	IEC 60115-1/JIS C 5201-1, Clause 4.18. With 260 ± 5 °C for 10 ± 1 sec.
Temperature Coefficient of Resistance(TCR)	Refer to the rating table information.	IEC 60115-1/JIS C 5201-1, Clause 4.8. Test temperature point is -55 °C and +155 °C.
Load Life Humidity	J: $\Delta R \leq \pm (3\% + 0.1 \Omega)$ F: $\Delta R \leq \pm (1\% + 0.05 \Omega)$	IEC 60115-1/JIS C 5201-1, Clause 4.24. Maintain the temperature of the resistor at 40 ± 2 °C and 90%~95% R.H. with the rated voltage applied. Cycle ON for 1.5 hours and OFF for 0.5hour for 1000(-0~+48) hours. After 1-4 hours, measure the resistance value.
Load Life	J: $\Delta R \leq \pm (3\% + 0.1 \Omega)$ F: $\Delta R \leq \pm (1\% + 0.05 \Omega)$	IEC 60115-1/JIS C 5201-1, Clause 4.25. Permanent resistance change after 1000(-0~+48) hours (1.5 hours ON, 0.5 hour OFF) at RCWV or Max. Keep the resistor at 70 ± 2 °C.
Temperature Cycle	J: $\Delta R \leq \pm (1\% + 0.1 \Omega)$ F: $\Delta R \leq \pm (0.5\% + 0.05 \Omega)$ No mechanical damage.	IEC 60115-1/JIS C 5201-1, Clause 4.19. Repeat 5 cycles as follows -55 °C (30 Min.), 25 °C (2-3Min.), +155 °C (30Min.).
Insulation Resistance	Between termination and coating must be over 1000MΩ.	IEC 60115-1/JIS C 5201-1, Clause 4.6. Test voltage: 100 ± 15V.
Bending Strength	J: $\Delta R \leq \pm (1\% + 0.1 \Omega)$ F: $\Delta R \leq \pm (0.5\% + 0.05 \Omega)$ No mechanical damage.	IEC 60115-1/JIS C 5201-1, Clause 4.33. Resistance change after bended on the 90mm PCB. Bend: 3mm for 0603, 0805, 2mm for 1206.

## Single Layer Chip Ceramic Capacitor(SLC)

General SLC	Margin SLC	Surface Mounting SLC	Array SLC	Multi-PAD SLC
SG	SM	SS	SA	SP
				
<b>Applications:</b> RF, Microwave and Millimeter Wave. <b>Frequency:</b> 100MHz~100GHz, <b>Capacitance:</b> 0.05~10000pF	<b>Applications:</b> RF, Microwave and Millimeter Wave. <b>Frequency:</b> 100MHz~100GHz, <b>Capacitance:</b> 0.05~10000pF	High Precision Single Layer Series Capacitor	An array consisting of multiple single-layer capacitors, suitable for multiple coupling and bypassing.	Multiple capacitance value, Binary Tunable Single Layer Capacitor, Suited for Tuning Design or Microwave Integrated Circuit.

Meet Standard: MIL-PRF-49464C

### ◆ Inspection Item

Group	Item	Test Method	Test Condition
A1	Burn in	-	-
A1	Capacitance	-	100%
A1	Dissipation Factor(D.F.)	-	100%
A1	IR	-	100%
A1	DWV	-	100%
A3	Visual	Method 2032 of MIL-STD-883	-
A4	Solderability	Method 2022 of MIL-STD-883	-
B1	Bond Strength	Method 2011 of MIL-STD-883	D, 3 grams minimum with .001" dia wire
B1	Die shear Strength	Method 2019 of MIL-STD-883	Limit per MIL-STD-883, Figure 2019-4
B2	Temperature Coefficient	-	-
C1	Thermal Shock and Immersion	Method 107,104 of MIL-STD-202	Thermal shock: A; Immersion: B
C2	Resistance to Solder Heat	Method 210 of MIL-STD-202	C, 260°C for 20 seconds.
C2	Moisture Resistance	Method 106 of MIL-STD-202	-
C4	Life	Method 108 of MIL-STD-202	Applied 200% rated voltage, 2000Hous.
C3	Humidity, steady state, low voltage	Method 103 of MIL-STD-202	Condition A.

### ◆ Product Features

Suited for Conducting Resin, AuSn Eutectic Soldering, Gold wire Bonding.

ESD Proof, RoHS Compliant, Frequency up to 100GHz.


Rated Voltage up to 100VDC

Capacitance: 0.04~10000pF




### ◆ Product Applications

DC Blocking, RF Bypass, Active Filter, Impedance Matching at RF/Microwave Frequencies.
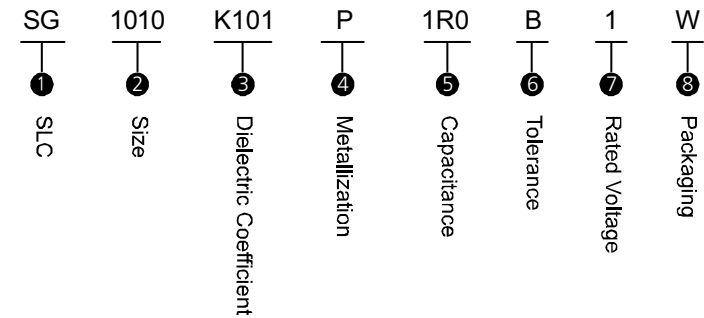
### ◆ Part Number



### ① SLC Series Capacitors

General SLC	Margin SLC	Surface Mounting SLC
SG	SM	SS
		
<b>Applications:</b> RF, Microwave and Millimeter Wave. <b>Frequency:</b> 100MHz~100GHz, <b>Capacitance:</b> 0.05~10000pF	<b>Applications:</b> RF, Microwave and Millimeter Wave. <b>Frequency:</b> 100MHz~100GHz, <b>Capacitance:</b> 0.05~10000pF	High Precision Single Layer Series Capacitor

### ② Size

The first two digits is length, The second two digits is width, Unit: mil;

For example: 1010, Length is 10mil (0.254mm), Width is 10mil (0.254mm).

### ③ Dielectric Coefficient

Dielectric Coefficient < 10, K6R6=6.6; Dielectric Coefficient ≥ 10, K101=100.

Dielectric Kind	Dielectric Constant	Temperature Coefficient	Temperature Range	Max. D. F	I.R. Min@ 25°C
I Type	3.8	0 ± 15ppm	-55 ~ 125°C	0.01%@10GHz	10 <sup>12</sup>
	3.9	0 ± 15ppm	-55 ~ 125°C	0.01%@10GHz	10 <sup>12</sup>
	6.6	0 ± 15ppm	-55 ~ 125°C	0.01%@10GHz	10 <sup>12</sup>
	8.7	+120 ± 25ppm	-55 ~ 125°C	0.01%@10GHz	10 <sup>12</sup>
	9.6	+180 ± 50ppm	-55 ~ 125°C	0.06%@10GHz	10 <sup>12</sup>
	9.8	+180 ± 50ppm	-55 ~ 125°C	0.06%@10GHz	10 <sup>12</sup>
	12.6	0 ± 30ppm	-55 ~ 125°C	0.01%@10GHz	10 <sup>12</sup>
	20	0 ± 30ppm	-55 ~ 125°C	0.10%@10GHz	10 <sup>12</sup>
	40	0 ± 30ppm	-55 ~ 125°C	0.20%@10GHz	10 <sup>12</sup>
	50	0 ± 30ppm	-55 ~ 125°C	0.50%@10GHz	10 <sup>12</sup>
II Type	84	0 ± 30ppm	-55 ~ 125°C	0.50%@10GHz	10 <sup>10</sup>
	150	-1500 ± 400ppm	-55 ~ 125°C	0.25%@10GHz	10 <sup>12</sup>
	300	+5% ~ -10%	-55 ~ 125°C	1.00%@1MHz	10 <sup>11</sup>
	1100	+10% ~ -10%	-55 ~ 125°C	1.50%@1MHz	10 <sup>11</sup>
	2200	+3% ~ -10%	-55 ~ 125°C	1.50%@1MHz	10 <sup>11</sup>
III Type	4000	0% ~ -35%	-55 ~ 125°C	2.00%@1MHz	10 <sup>11</sup>
	5000	0% ~ -60%	-55 ~ 125°C	2.50%@1MHz	10 <sup>11</sup>
	11000	0% ~ -80%	-55 ~ 125°C	2.50%@1MHz	10 <sup>11</sup>
	25000	± 15%	-55 ~ 125°C	3.50%@1MHz	10 <sup>10</sup>
	35000	± 15%	-55 ~ 125°C	3.50%@1MHz	10 <sup>10</sup>

### ④ Metallization

Code	Sputter Layer		Plating Layer	
	Metal	Thickness	Metal	Thickness
M	TiW/Au	300 Å ~ 1000 Å / 300 Å ~ 500 Å	Au	≥ 1.3 μm
P	TiW/Ni/Au	300 Å ~ 1000 Å / 0.2 μm ~ 0.6 μm / 300 Å ~ 500 Å	Au	≥ 1.3 μm
S	Ti/Ni/Au	500 Å ~ 2000 Å / 0.2 μm ~ 0.6 μm / 300 Å ~ 1000 Å	Au	≥ 1.3 μm
Q	Ti/Au	500 Å ~ 2000 Å / 300 Å ~ 1000 Å	Au	≥ 1.3 μm
T	TaN/TiW/Au	300 Å ~ 1000 Å / 300 Å ~ 1000 Å / 300 Å ~ 500 Å	Au	≥ 1.3 μm
F	TaN/TiW/Ni/Au	300 Å ~ 1000 Å / 300 Å ~ 1000 Å / 0.2 μm ~ 0.6 μm / 300 Å ~ 1000 Å	Au	≥ 1.3 μm

### ⑤ Capacitance

Less than 10pF, 1R0=1.0pF; No less than 10pF, 101=100pF.

### ⑥ Tolerance

Code	A	B	C	D	F	G	J	K	M
Tolerance	± 0.05pF	± 0.1pF	± 0.25pF	± 0.5pF	± 1%	± 2%	± 5%	± 10%	± 20%

### ⑦ Rated Voltage

Code	Rated Voltage(V)	Code	Rated Voltage(V)
B	16	2	25
5	50	1	100

### ⑧ Packaging Type

W: Waffle Packaging; G: Stick Box; R: Film Ring.





◆SS Series Capacitance Table

Cap.pF	Size (inch/millimeter)															
	2010 (.508 x .254) 5mil Gap				4020 (1.016 x .508) 10mil Gap				6030 (1.524 x .762) 10mil Gap				8040 (2.032 x 1.016) 20mil Gap			
	16V	25V	50V	100V	16V	25V	50V	100V	16V	25V	50V	100V	16V	25V	50V	100V
0.06	40	40	40	40	9.6	9.6	9.6	9.6	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8
0.08	40	40	40	40	9.6	9.6	9.6	9.6	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8
0.1	84	84	84	84	40	40	40	40	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6
0.2	150	150	150	150	40	40	40	40	9.6	9.6	9.6	9.6	9.6	9.6	9.6	9.6
0.3	300	300	300	300	40	40	40	40	40	40	40	40	9.6	9.6	9.6	9.6
0.4	300	300	300	300	84	84	84	84	40	40	40	40	40	40	40	40
0.5	300	300	300	300	84	84	84	84	40	40	40	40	40	40	40	40
0.6	300	300	300	300	84	84	84	84	40	40	40	40	40	40	40	40
0.8	1100	1100	1100	1100	150	150	150	150	40	40	40	40	40	40	40	40
1.0	1100	1100	1100	1100	150	150	150	150	84	84	84	84	40	40	40	40
1.2	1100	1100	1100	1100	150	150	150	150	84	84	84	84	40	40	40	40
1.5	1100	1100	1100	1100	300	300	300	300	84	84	84	84	84	84	84	84
1.8	1100	1100	1100	1100	300	300	300	300	84	84	84	84	84	84	84	84
2.0	1100	1100	1100	1100	300	300	300	300	84	84	84	84	84	84	84	84
2.2	1100	1100	1100	1100	300	300	300	300	150	150	150	150	84	84	84	84
2.7	2200	2200	2200	2200	300	300	300	300	150	150	150	150	84	84	84	84
3.3	2200	2200	2200	2200	1100	1100	1100	1100	150	150	150	150	150	150	150	150
3.9	2200	2200	2200	2200	1100	1100	1100	1100	300	300	300	300	150	150	150	150
4.7	2200	2200	2200	2200	1100	1100	1100	1100	300	300	300	300	150	150	150	150
5.6	4000	4000	4000	4000	1100	1100	1100	1100	300	300	300	300	300	300	300	300
6.8	4000	4000	4000	4000	1100	1100	1100	1100	300	300	300	300	300	300	300	300
8.2	5000	5000	5000	5000	1100	1100	1100	1100	1100	1100	1100	1100	300	300	300	300
10	5000	5000	5000	5000	2200	2200	2200	2200	1100	1100	1100	1100	300	300	300	300
12	15000	15000	15000	15000	2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100
15	15000	15000	15000	15000	2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100
18	15000	15000	15000		2200	2200	2200	2200	1100	1100	1100	1100	1100	1100	1100	1100
20	15000	15000	15000		4000	4000	4000	4000	1100	1100	1100	1100	1100	1100	1100	1100
22	15000	15000	15000		4000	4000	4000	4000	1100	1100	1100	1100	1100	1100	1100	1100
27	25000	25000	25000		4000	4000	4000	4000	2200	2200	2200	2200	1100	1100	1100	1100
33	25000	25000			5000	5000	5000	5000	2200	2200	2200	2200	2200	2200	2200	2200
39	25000				5000	5000	5000	5000	2200	2200	2200	2200	2200	2200	2200	2200
47	35000				15000	15000	15000	15000	2200	2200	2200	2200	2200	2200	2200	2200
56	35000				15000	15000	15000	15000	4000	4000	4000	4000	2200	2200	2200	2200
68	35000				15000	15000	15000		4000	4000	4000	4000	4000	4000	4000	4000
82					15000	15000	15000		5000	5000	5000	5000	5000	5000	5000	5000
100					25000	25000	25000		5000	5000	5000	5000	5000	5000	5000	5000
120					25000	25000			15000	15000	15000	15000	5000	5000	5000	5000
150					25000				15000	15000	15000	15000	5000	5000	5000	5000
180					25000				15000	15000	15000		15000	15000	15000	15000
200					35000				15000	15000	15000		15000	15000	15000	15000
220					35000				25000	25000	25000		15000	15000	15000	15000
270					35000				25000	25000	25000		15000	15000	15000	15000
330									25000	25000			15000	15000	15000	
390									25000				25000	25000	25000	
470									35000				25000	25000		
560									35000				25000	25000		
680									35000				25000			
820													35000			
1000													35000			
1200													35000			
					I Type Dielectric			II Type Dielectric					III Type Dielectric			


Note: 1) Difference colour corresponds to difference Dielectric, It is possible to change Dielectric constant.  
2) Special Capacitance and rated voltage, Please contact Dalicap.

SA Series Array SLC

◆Product Features

Simplified assembly. Can be integrated into IC package to reduce bond wire lengths and reduce assembly costs. SA array SLC is mainly used in GaAs IC. Capacitor quantity is 10 pieces maximum.


The total size is theoretically minimum 20x 10 mils.



◆Product Applications

Decoupling, RF Bypass, DC Blocking for GaAs IC at RF/Microwave Frequencies.

◆Part Number

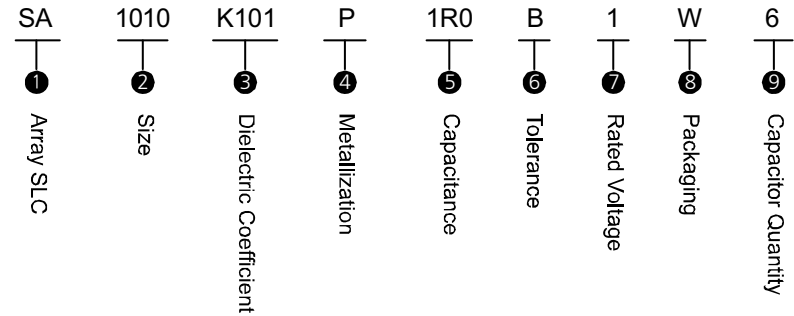

① SLC Series Capacitors

SG	SM	SS	SA	SP
General SLC	Margin SLC	Surface Mounting SLC	Array SLC	Multi-PAD SLC

② Size

The first two digits is length, The second two digits is width, Unit: mil;  
For example: 1010, Length is 10mil (0.254mm), Width is 10mil (0.254mm).

### ③ Dielectric Coefficient

Dielectric Coefficient < 10, KGR6=6.6; Dielectric Coefficient ≥ 10, K101=100.

Dielectric Kind	Dielectric Constant	Temperature Coefficient	Temperature Range	Max. D. F	I.R. Min@ 25°C
I Type	3.8	0 ± 15ppm	-55 ~ 125 °C	0.01% @ 10GHz	10 <sup>12</sup>
	3.9	0 ± 15ppm	-55 ~ 125 °C	0.01% @ 10GHz	10 <sup>12</sup>
	6.6	0 ± 15ppm	-55 ~ 125 °C	0.01% @ 10GHz	10 <sup>12</sup>
	8.7	+120 ± 25ppm	-55 ~ 125 °C	0.01% @ 10GHz	10 <sup>12</sup>
	9.6	+180 ± 50ppm	-55 ~ 125 °C	0.06% @ 10GHz	10 <sup>12</sup>
	9.8	+180 ± 50ppm	-55 ~ 125 °C	0.06% @ 10GHz	10 <sup>12</sup>
	12.6	0 ± 30ppm	-55 ~ 125 °C	0.01% @ 10GHz	10 <sup>12</sup>
	20	0 ± 30ppm	-55 ~ 125 °C	0.10% @ 10GHz	10 <sup>12</sup>
	40	0 ± 30ppm	-55 ~ 125 °C	0.20% @ 10GHz	10 <sup>12</sup>
	50	0 ± 30ppm	-55 ~ 125 °C	0.50% @ 10GHz	10 <sup>12</sup>
II Type	84	0 ± 30ppm	-55 ~ 125 °C	0.50% @ 10GHz	10 <sup>10</sup>
	150	-1500 ± 400ppm	-55 ~ 125 °C	0.25% @ 10GHz	10 <sup>12</sup>
	300	+5% ~ -10%	-55 ~ 125 °C	1.00% @ 1MHz	10 <sup>11</sup>
	1100	+10% ~ -10%	-55 ~ 125 °C	1.50% @ 1MHz	10 <sup>11</sup>
	2200	+3% ~ -10%	-55 ~ 125 °C	1.50% @ 1MHz	10 <sup>11</sup>
III Type	4000	0% ~ -35%	-55 ~ 125 °C	2.00% @ 1MHz	10 <sup>11</sup>
	5000	0% ~ -60%	-55 ~ 125 °C	2.50% @ 1MHz	10 <sup>11</sup>
	11000	0% ~ -80%	-55 ~ 125 °C	2.50% @ 1MHz	10 <sup>11</sup>
	25000	± 15%	-55 ~ 125 °C	3.50% @ 1MHz	10 <sup>10</sup>
	35000	± 15%	-55 ~ 125 °C	3.50% @ 1MHz	10 <sup>10</sup>

### ④ Metallization

Code	Sputter Layer		Plating Layer	
	Metal	Thickness	Metal	Thickness
M	TiW/Au	300 Å ~ 1000 Å / 300 Å ~ 500 Å	Au	≥ 1.3 μm
P	TiW/Ni/Au	300 Å ~ 1000 Å / 0.2 μm ~ 0.6 μm / 300 Å ~ 500 Å	Au	≥ 1.3 μm
S	Ti/Ni/Au	500 Å ~ 2000 Å / 0.2 μm ~ 0.6 μm / 300 Å ~ 1000 Å	Au	≥ 1.3 μm
Q	Ti/Au	500 Å ~ 2000 Å / 300 Å ~ 1000 Å	Au	≥ 1.3 μm
T	TaN/TiW/Au	300 Å ~ 1000 Å / 300 Å ~ 1000 Å / 300 Å ~ 500 Å	Au	≥ 1.3 μm
F	TaN/TiW/Ni/Au	300 Å ~ 1000 Å / 300 Å ~ 1000 Å / 0.2 μm ~ 0.6 μm / 300 Å ~ 1000 Å	Au	≥ 1.3 μm

### ⑤ Capacitance

Less than 10pF, 1R0=1.0pF; No less than 10pF, 101=100pF.

### ⑥ Tolerance

Code	A	B	C	D	F	G	J	K	M
Tolerance	± 0.05pF	± 0.1pF	± 0.25pF	± 0.5pF	± 1%	± 2%	± 5%	± 10%	± 20%

### ⑦ Rated Voltage

Code	Rated Voltage(V)	Code	Rated Voltage(V)
B	16	2	25
5	50	1	100

### ⑧ Packaging Type

W: Waffle Packaging; G: Stick Box; R: Film Ring.

### ⑨ Capacitor Quantity

Capacitor quantity 10 pieces Maximum.



◆SA Series Single Capacitance Table

WVDC(Rated voltage) Unit: V

Cap.pF	Size(inch/millimeter)																		
	1010 (.254 x .254)		1212 (.305 x .305)		1515 (.381 x .381)		2020 (.508 x .508)		2525 (.635 x .635)		3030 (.762 x .762)		3535 (.889 x .889)		4040 (1.016 x 1.016)		5050 (1.270 x 1.270)		
	K	WVDC	K	WVDC	K	WVDC	K	WVDC	K	WVDC	K	WVDC	K	WVDC	K	WVDC	K	WVDC	
0.04	9.6	50	9.6	100	9.6	100													
0.06	9.6	50	9.6	50	9.6	100	3.8	50	3.8	100									
0.08	40	100	9.6	50	9.6	100	9.6	100	3.8	100	3.8	100							
0.1	40	100	40	100	9.6	50	9.6	100	3.8	50	3.8	100							
0.2	40	50	40	100	40	100	9.6	50	9.6	100	9.6	100	3.8	50	3.8	100	3.8	100	
0.3	84	100	40	50	40	100	40	100	9.6	50	9.6	100	9.6	100	3.8	50	3.8	100	
0.4	84	50	84	100	40	50	40	100	40	100	9.6	50	9.6	100	9.6	100	3.8	50	
0.5	84	50	84	50	40	50	40	100	40	100	9.6	50	9.6	50	9.6	100	3.8	50	
0.6	150	100	84	50	84	100	40	100	40	100	40	100	9.6	50	9.6	100	9.6	100	
0.8	300	100	150	100	84	50	40	50	40	100	40	100	40	100	9.6	50	9.6	100	
1.0	300	100	150	50	84	50	84	100	40	100	40	100	40	100	9.6	50	9.6	50	
1.2	300	100	150	50	84	50	84	100	40	50	40	100	40	100	9.6	50	9.6	50	
1.5	300	50	300	100	150	50	84	50	40	50	40	100	40	100	40	100	9.6	50	
1.8	300	50	300	50	150	50	84	50	84	100	40	50	40	100	40	100	40	100	
2.0	300	50	300	50	150	50	150	100	84	100	40	50	40	50	40	100	40	400	
2.2	1100	50	300	50	150	50	150	100	84	50	84	100	40	50	40	100	40	100	
2.7	1100	100	300	50	300	100	150	50	84	50	84	100	40	50	40	50	40	100	
3.3	1100	100	1100	100	300	50	150	50	150	100	84	50	84	100	40	50	40	100	
3.9	1100	100	1100	100	300	50	300	100	150	50	84	50	84	100	84	100	40	100	
4.7	1100	50	1100	100	1100	100	300	100	150	50	150	100	84	50	84	100	40	50	
5.6	1100	50	1100	100	1100	100	300	50	300	100	150	50	84	50	84	50	40	50	
6.8	1100	50	1100	50	1100	100	300	50	300	100	150	50	150	100	84	50	84	100	
8.2	2200	100	1100	50	1100	100	300	50	300	50	150	50	150	50	150	100	150	100	
10	2200	50	1100	50	1100	50	1100	100	300	50	300	100	150	50	150	50	150	100	
12	2200	50	2200	100	1100	50	1100	100	300	50	300	100	150	50	150	50	150	100	
15	4000	100	2200	50	1100	50	1100	100	1100	100	300	50	300	100	300	100	150	100	
18	4000	50	2200	50	2200	100	1100	50	1100	100	1100	100	300	50	300	100	150	50	
20	4000	50	2200	50	2200	100	1100	50	1100	100	1100	100	300	50	300	50	150	50	
22	4000	50	4000	100	2200	50	1100	50	1100	100	1100	100	300	50	300	50	150	50	
27	4000	50	4000	50	2200	50	1100	50	1100	100	1100	100	300	50	300	50	300	100	
33	5000	50	4000	50	4000	100	2200	100	1100	50	1100	100	1100	100	300	50	300	50	
39	15000	100	4000	50	4000	50	2200	50	1100	50	1100	50	1100	100	1100	100	300	50	
47	15000	50	15000	100	4000	50	2200	50	2200	100	1100	50	1100	100	1100	100	300	50	
56	15000	50	15000	100	5000	50	4000	100	2200	50	1100	50	1100	50	1100	100	1100	100	
68	15000	50	15000	50	5000	50	4000	100	2200	50	2200	100	1100	50	1100	100	1100	100	
82	25000	50	15000	50	15000	100	5000	100	2200	50	2200	50	2200	100	2200	100	1100	100	
100	25000	25	25000	50	15000	100	5000	50	4000	100	2200	50	2200	100	2200	100	1100	100	
120	25000	25	25000	25	15000	50	15000	100	5000	100	2200	50	2200	50	2200	100	1100	50	
150	25000	16	25000	16	15000	50	15000	100	5000	50	5000	100	2200	50	2200	50	1100	50	
180	35000	16	25000	16	25000	50	15000	100	5000	50	5000	100	5000	100	4000	100	2200	100	
200	35000	16	25000	16	25000	25	15000	50	15000	100	5000	50	5000	100	4000	100	2200	100	
220	35000	16	35000	16	25000	25	15000	50	15000	100	5000	50	5000	100	4000	100	2200	100	
270			35000	16	25000	16	25000	50	15000	100	5000	50	5000	50	4000	50	2200	50	
330					25000	16	25000	50	15000	100	5000	50	4000	50	4000	100			
390					35000	16	25000	25	15000	50	15000	100	15000	100	15000	100	4000	100	
470					35000	16	25000	16	25000	25	15000	50	15000	100	15000	100	4000	50	
560							25000	16	25000	25	15000	50	15000	100	15000	100	4000	50	
680							35000	16	25000	16	25000	50	15000	50	15000	100	5000	50	
820							35000	16	35000	25	25000	25	15000	50	15000	50	15000	100	
1000									35000	16	25000	16	25000	50	15000	50	15000	100	
1200									35000	16	25000	16	25000	25	25000	25	15000	20	
1500											35000	16	25000	16	25000	25	15000	50	
1800											35000	16	35000	16	25000	16	25000	50	
2200													35000	16	25000	16	25000	25	
2700														35000	16	35000	16	25000	16
3300					I Type Dielectric				II Type Dielectric					III Type Dielectric				35000	25

Note: 1) Difference colour corresponds to difference Dielectric, It is possible to change Dielectric constant.  
2) Special Capacitance and rated voltage, Please contact Dalicap.


SP Series Multi-Pad SLC

◆Product Features

Small geometric size is suitable for microwave circuit and is good for circuit design and adjustment.

SP Array SLC is mainly customized according to customer drawings and requirements.

Maximum overall size:10 × 10mm, Minimum overall size:0.3 × 0.3mm, Minimum machining gap: 50μm, Thickness: 0.15–0.25mm.



◆Product Applications

Matching Networks, Parallel Resonance Circuits, Dielectric Resonator Tuning & Coupling at RF/Microwave Frequencies.

◆Part Number

